



AVK EXTENSION SPINDLE, FIXED LENGTH

04/05

For service connection valves, key adaptor #14-22

001

AVK extension spindles in fixed length are designed for ease of use and long service life. The patented design facilitates fast and easy shortening of the extension spindle as the complete adjustment can be done by mere use of a hacksaw. The extension spindles are made of corrosion-free materials and the bottom cover protects against penetration of impurities.

Product Description:

Extension spindle for service connection valves - Fixed length - key adaptor #14-22 for water, neutral liquids and gas

Standards:

- Designed to all standards


Features:

- The expanding bolt design facilitates easy height adjustment
- The conical key adaptor fits most standard T-keys
- The inner tube is press fit to the key adaptor and bottom adaptor to safeguard the galvanization of the tube
- The bottom cover protects the valve spindle from sand and dirt and enables it to rotate freely
- Patented and fast "Safe-click" mounting by fixing the spindle adaptor to the valve stem with a split and turning the bottom adaptor until a "click" indicates fixation to the valve bonnet
- Available in 5 different lengths

Accessories:

T-key, surface box and support tile



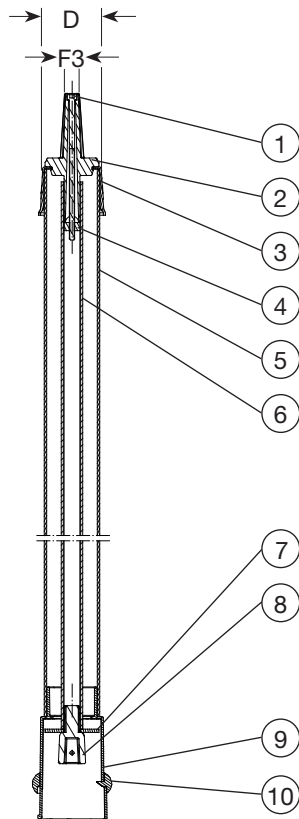

Component List:

1. Bolt	Stainless steel	2. Key adaptor	Cast stainless steel
3. Sleeve	PE	4. Nut	Stainless steel
5. Protection tube	PE	6. Inner tube	Galvanized steel
7. Stop ring	PE	8. Spindle adapter	Cast stainless steel
9. Bottom cover	PE	10. Click ring	PE

Components may be substituted with equivalent or higher class materials without prior notification.

Reference Nos. and Dimensions:

AVK ref. nos	DN/DN mm	D mm	Pipe cover mm	F3 mm	Theoretic. weight kg
04-032-1-5001	25 - 50	64	800	14 - 22	2.0
04-032-1-5501	25 - 50	64	1000	14 - 22	1.6
04-032-1-6001	25 - 50	64	1250	14 - 22	2.0
04-032-1-6501	25 - 50	64	1500	14 - 22	2.4
04-032-1-7501	25 - 50	64	2000	14 - 22	3.2
04-032-1-8001	25 - 50	64	3000	14 - 22	4.8
04-032-1-9001	25 - 50	64	2000	14 - 22	3.6
04-032-1-9201	25 - 50	64	2500	14 - 22	4.5
04-032-1-9401	25 - 50	64	3000	14 - 22	48