



AVK REDUCER FLANGE

712/3550-001

PN 10/16



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



Product description:

Double reducer flange type XR to EN 545 for water, waste water and neutral liquids to max. 70° C


Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16




Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.
- Bolts of Zinc coated steel 8.8 as standard, optionally of stainless steel A2 or A4.

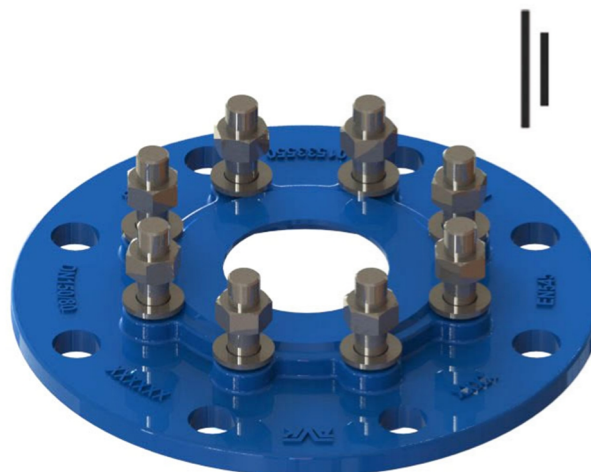

Expect ... **AVR**

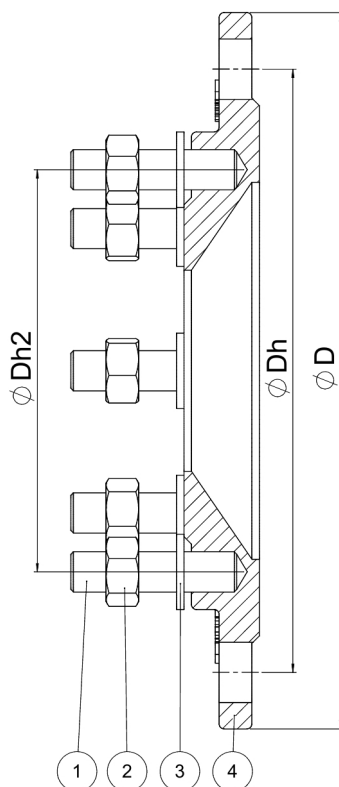

Component list:

1. Stud bolt	Steel, hot dip galvanized	3. Washer	Steel, hot dip galvanized
2. Nut	Steel, hot dip galvanized	4. Body	Ductile iron

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN/DN	Product PN Class	D mm	Dh mm	Dh2 mm	Theoretical weight / kg
712-0104-35-501060	40 - 100	PN 10/16	220	180	110	5.1
712-0153-35-501060	80 - 150	PN 10/16	285	240	160	9.3
712-0153-35-502060	80 - 150	PN16	285	240	160	8.1
712-0154-35-501060	65 - 150	PN16	285	240	145	9.1
712-0157-35-501060	60 - 150	PN 10/16	285	240	135	9.0
712-0202-35-500060	125 - 200	PN10	340	295	210	12
712-0202-35-501060	125 - 200	PN16	340	295	210	12
712-0203-35-500060	100 - 200	PN10	340	295	180	13
712-0203-35-501060	100 - 200	PN16	340	295	180	13
712-0204-35-500060	80 - 200	PN10	340	295	160	13
712-0204-35-501060	80 - 200	PN16	340	295	160	13
712-0204-35-502060	80 - 200	PN16	340	295	160	13
712-0204-35-504060	80 - 200	PN10	340	295	160	13
712-0205-35-500060	65 - 200	PN10	340	295	145	13
712-0205-35-501060	65 - 200	PN16	340	295	145	14
712-0210-35-500060	60 - 200	PN10	340	295	135	13
712-0210-35-501060	60 - 200	PN16	340	295	135	13
712-0252-35-500060	150 - 250	PN10	405	350	240	20
712-0252-35-501060	150 - 250	PN16	405	355	240	20
712-0253-35-500060	125 - 250	PN10	405	350	210	16
712-0253-35-501060	125 - 250	PN16	405	355	210	16
712-0302-35-500060	200 - 300	PN10	460	400	295	23
712-0302-35-501060	200 - 300	PN16	460	410	295	23
712-0304-35-500060	125 - 300	PN10	460	400	210	22
712-0304-35-501060	125 - 300	PN16	460	410	210	22

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

