



## AVK DUCKFOOT BEND FLANGED, PN 10/16

712/7010-001



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



### Product description:

Double flanged duckfoot bend type N to EN 545 for water, waste water and neutral liquids to max. 70° C


### Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16




### Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

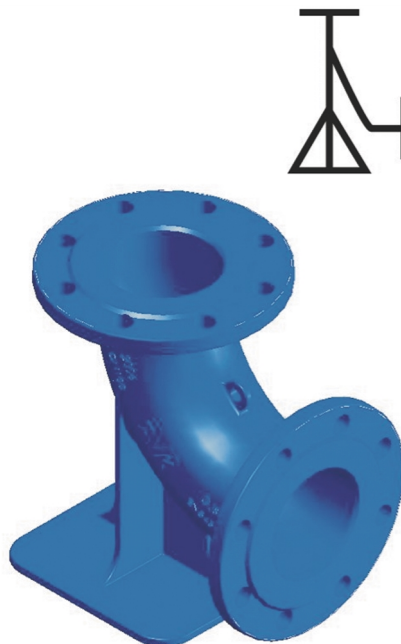

Expect ... **AVR**

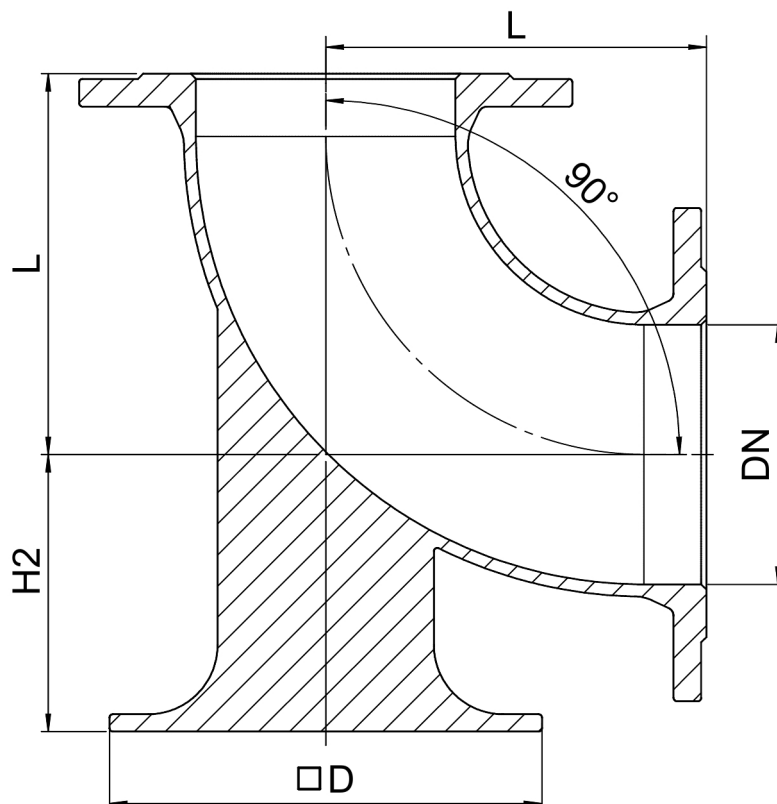

**Component list:**

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	Flange drilling	L mm	D mm	H2 mm	Theoretical weight / kg
712-0080-70-101	80	PN10/16	165	180	110	12
712-0100-70-101	100	PN10/16	180	200	125	15
712-0150-70-101	150	PN10/16	220	250	160	34
712-0200-70-100	200	PN10	260	300	190	52
712-0200-70-101	200	PN16	260	300	190	52
712-0250-70-100	250	PN10	350	350	225	84
712-0250-70-101	250	PN16	350	350	225	84
712-0300-70-100	300	PN10	400	400	255	119
712-0300-70-101	300	PN16	400	400	255	119