



AVK STEM CAPS

04/22

For AVK gate valves, service connection valves and extension spindles to EN

001



To protect the top of extension spindles, service connection valves and gate valves AVK recommends AVK Stem caps. The stem caps are available in different sizes and are all epoxy coated.



Product Description:

Stem cap for valves and extension spindles

Standards:


- Designed to all standards



Features:

- Stem caps for extension spindles of grey cast iron GJL-250 (GG-25) with epoxy coating and bolt of zinc coated steel 8.8
- Stem caps for valves of ductile iron GJS-400-15 (GGG-40) with epoxy coating
- Type 08/61 is delivered with bolt of stainless steel A2



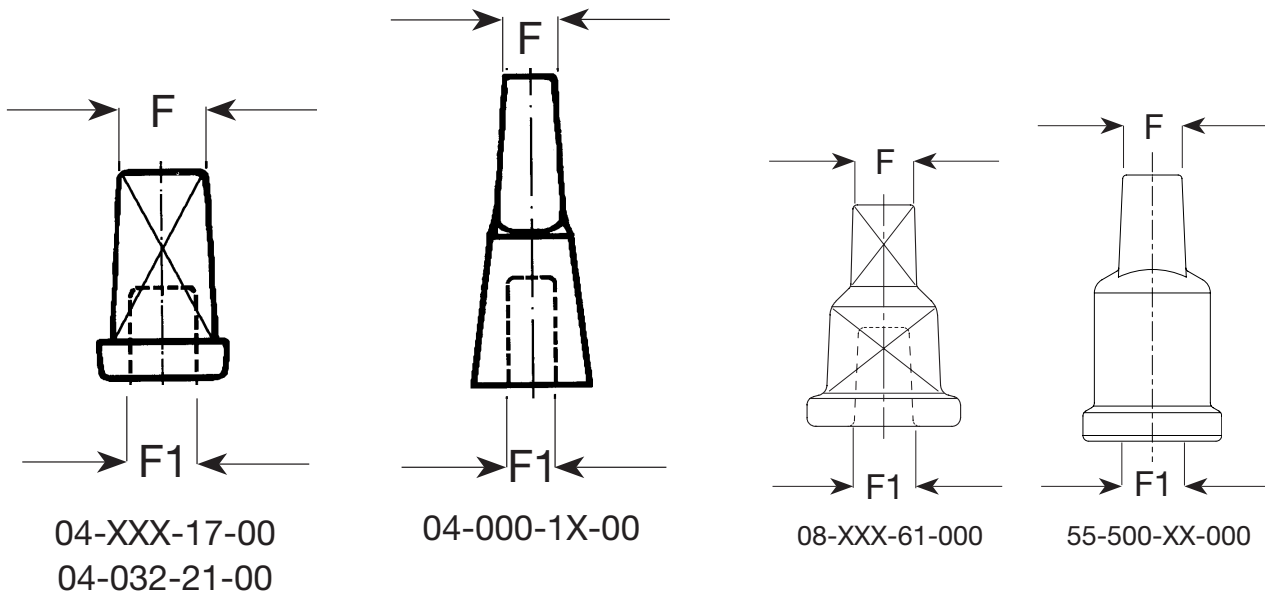

Component List:

Reference Nos. and Dimensions:

AVK ref. nos	DN/DN mm	F mm	F1 mm	Theoretic. weight kg
04-000-10-00 ⁽¹⁾	40 - 50	23-32	14	1.1
04-000-11-00 ⁽¹⁾	65 - 80	23-32	17	1.1
04-000-12-00 ⁽¹⁾	100 - 150	23-32	19	1.2
04-000-13-00 ⁽¹⁾	200 - 200	23-32	24	1.8
04-000-14-00 ⁽¹⁾	250 - 300	23-32	27	1.8
04-032-21-00 ⁽²⁾	25 - 50	27-32	13	0.4
04-160-17-00 ⁽³⁾	25 - 150	27-32	16/20	0.4
04-400-17-00 ⁽³⁾	200 - 400	27-32	25	1.3
08-040-61-000 ⁽⁴⁾	40 - 50	30	14	0.2
08-065-61-000 ⁽⁴⁾	65 - 80	30	17	1.0
08-100-61-000 ⁽⁴⁾	100 - 150	30	19	0.6
08-200-61-000 ⁽⁴⁾	200 - 200	30	24	1.1
08-250-61-000 ⁽⁴⁾	250 - 300	30	27	1.1
08-400-61-000 ⁽⁴⁾	350 - 500	30	32	0.1
55-500-18-000 ⁽⁵⁾	450 - 600	32	Ø41	3.5
55-500-22-000 ⁽⁶⁾	450 - 600	27	Ø31	3.0

⁽¹⁾ For standard gate valves, fits for AVK t-keys
⁽²⁾ For service connection valves
⁽³⁾ For extension spindles
⁽⁴⁾ With bolt in stainless steel, A2 for standard gate valves
⁽⁵⁾ For series 55/30 gate valves, ø40 mm
⁽⁶⁾ For series 06 and 55/35 gate valves, ø30 mm